


Main Elevation

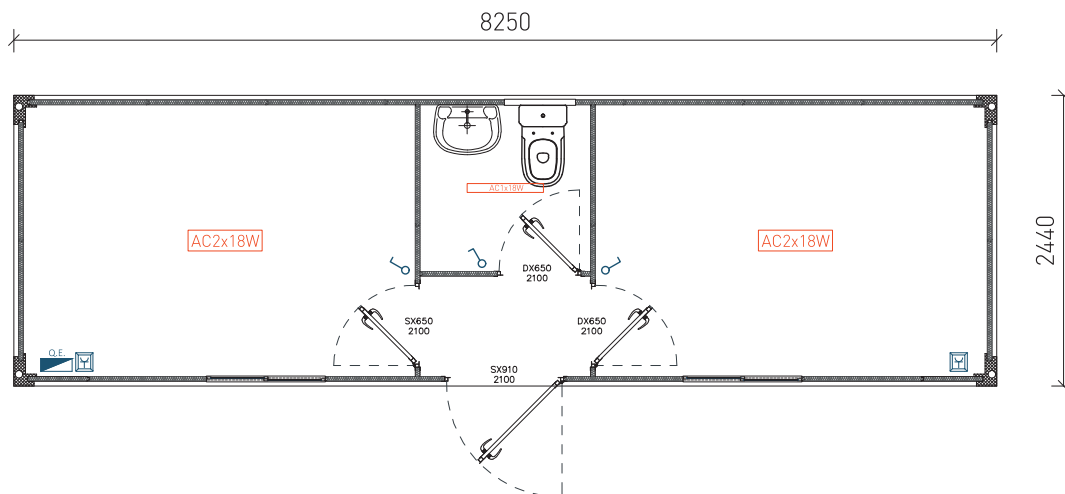

| | |
|--------------------|--|
| Width (Ext.) | 2440mm. |
| Height (Int.) | 2500mm (Option 3000mm). |
| Windows | Sliding lacquered white aluminium windows, 1000x1045mm, with gratings and anti-mosquito net. |
| Doors | Lacquered white steel isolated doors, 40 mm thick (according to drawing). |
| Panel | Sandwich 1000mm; thickness 40mm; shaped. |
| Pavement type | Base: Galvanized structure with locking in omegas. Floor in MGO. |
| Pavement covering | Vinyl screen. |
| Coverage | Galvanized profiled plate. False ceiling consisting of 30 mm sandwich panel. |
| Coverage isolation | Rock wool with vapor barrier, 60mm thick. |
| Electrical board | 1 Differential 25A/30mA, 1 breaker 10A + 2 of 16A (with AC + 1 circuit breaker 16A). |
| Sockets | Monophase and surface mounted socket (according to drawing). |
| Switch | Surface mount (according to drawing). |
| WC | Simple washbasin; toilet; armor 2x18W |