



## **MODULE MD 8.9**

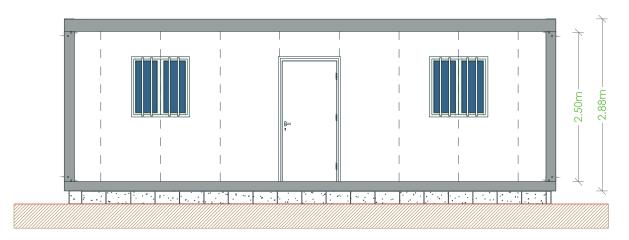

## **Main Elevation**

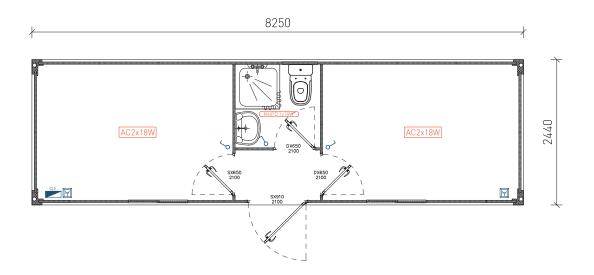

Width (Ext.)

Height (Int.)

Windows

Doors

Panel

Pavement type

Pavement covering

Coverage

Coverage isolation

Electrical board

Sockets

Switch WC 2440mm.

2500mm (Option 3000mm).

Sliding lacquered white aluminium windows, 925x1045mm, with gratings and anti-mosquito net.

Lacquered white steel isolated doors.

Sandwich 950mm; thickness 40mm; shaped.

Base: Galvanized structure with locking in omegas. Floor in MGO.  $\label{eq:mass_eq}$ 

Vinyl screen.

Galvanized profiled plate. False ceiling consisting of 30 mm sandwich panel.

Rock wool with vapor barrier, 60mm thick.

Differential 25A/30mA 1, 1 + 2 breaker 10A 16A (with AC + 1 circuit breaker 16A).

 $\label{thm:monophase} \mbox{Monophase and surface mounted socket (according to drawing)}.$ 

Surface mount (according to drawing).

Simple basin; toilet, armor 2x18W; shower base; water heater 30L